




DUPLEX FILTER

The Duplex Filter shall be of Stainless Steel AISI 316L construction and equipped with strainers with the option of inserting Bag Filters. The filter consists of 2 single filters with 4 manual butterfly valves with DIN connections for bypassing one of the filters for cleaning while the other is in operation.

The filter will be furnished with:

- 1 set Strainer with 1 mm perforation
- Heating Jacket
- The manual valves will be of butterfly valves.
- Filter Bags – 2 no's
- Drain Valves – 2 no's

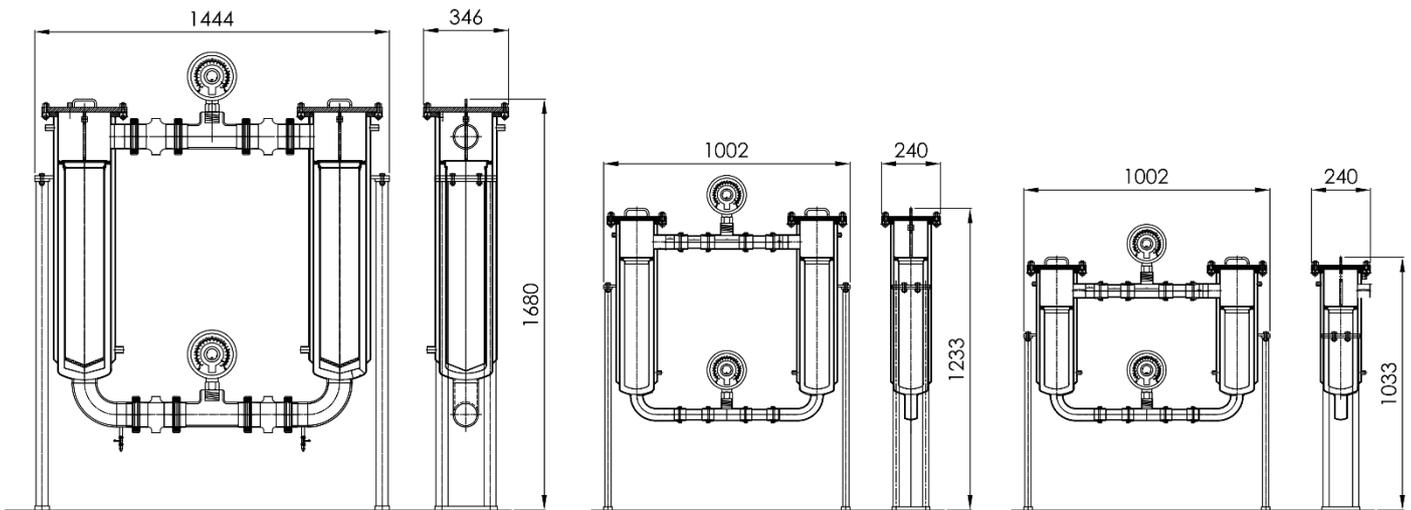

Duplex Filter Technical Specifications

Model	DF-730	DF-420	DF-412
Fiter Bags	7" X 30 "	4" X 20"	4" X 12"
Filtration	Upto 1 μ	Upto 1 μ	Upto 1 μ
End Connection	3", 4" OD	2 1/2", 2" OD	1 1/4", 1 1/2, 2" OD
MOC	Wetted Parts - SS316L	Wetted Parts - SS316L	Wetted Parts - SS316L
Heating Jacket	Y	Y	Y
Test Pressure	10 bar	10 bar	10 bar
Pressure Gauge	Inlet, Outlet	Inlet, Outlet	Inlet, Outlet
Pressure Transmitter	Optional	Optional	Optional

